


Write your card  
the first time...



Rewrite the same  
card over & over!

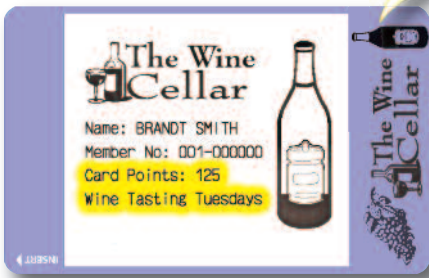

- Write up to 300 times on the same card
- No ribbon or cartridge required
- Support Leuco card (white) or Thermochromic cards (silver)
- Full ISO 3-Track Magnetic Stripe Read/Write Compatible



## TCP300II Thermal Re-Writable Card Reader/Writer

The TCP300II series offers the latest generation of Visual Card Reader/Writer systems. The TCP300II is a printer device which is used to write and erase information on 10 Mills thick cards. Information like loyalty points and special promotions can be updated any time the card is entered into the printer device. The unique dual pass head can provide clear text, barcodes, photos or other high quality graphics at 60mm/second. The TCP series are compact and streamlined units that will fit into any environment and are simple to operate. The card is simply inserted into the front of the unit, updated and automatically ejected in as little as 4 seconds.

Keep your customers with updated loyalty card!

Perfect Solution for:

- Loyalty Applications
- Temporary Identification Cards
- Appointment Reminder Cards
- Event Credentials
- Membership Cards
- Mass Transit Pass
- Gaming Players' cards



Always Leading - Always Innovating

# TCP300II Specifications

| The Complete POS Solution!  |  |   |
|---|--|---|
| <b>Features</b>   | <b>Hardware</b><br>High Quality Graphic & Text Print<br>Supports Thermo Chromic, High Speed Leuco and One-time Write Thermal Cards<br>Card Thickness 0.18mm to 0.33mm<br>3-Track Magnetic Stripe Read / Write Capability<br>ISO Standard 7811/4,5<br>Card Media Re-Writable up to 500 Times<br>Swappable Communication Interface<br>Small Foot Print<br>Built-in Universal Power Supply<br>Simple Maintenance w/ Cleaning Required Notification LED<br>Field Maintainable Design | <b>Software</b><br>Windows Raster Driver<br>OCX Driver (ActiveX Control)<br>Card Setting Utility<br>Demo Utility & Sample Code for System Development |
|   | <b>Connectivity</b><br><br>Note: Connections in <b>bold</b> are supported; grayed-out connection types may be supported by special demand.   | 9-pin Serial<br>25-pin Serial<br>Parallel<br>USB<br>Powered USB<br><b>Ethernet</b><br>Wi-Fi   |
| <b>Drivers</b><br><br>Note: Drivers in <b>bold</b> are immediately available; grayed-out operating systems may be supported on request. | <b>Windows</b><br><b>98, ME</b><br><b>NT 4.0</b><br><b>WEPOS</b><br><b>2000, XP</b><br><b>CE</b><br><b>XP Embedded</b><br><b>VISTA</b>   | OPOS<br>Java POS<br>Linux<br>Mac OSX  |
| <b>What's Included</b>  | Cleaning Card<br>User Manual<br>Installation CD<br>Ferrite Core (USB, Ethernet models)   |   |
| <b>Optional Accessories</b>   | Putty or Gray Color Housing<br>Available as Mechanism for kiosk Application<br>Interface Cover<br>Cleaning Kit   |   |
| <b>Technical Specifications</b>   | Print Method : Direct Thermal<br>Print Speed : 400mm/s (When Accessing Magnetic Stripe), 60mm/s (When Printing TC Card / High Speed Leuco Card)<br>Media : Thermo Chromic, Leuco or One-time Write Thermal<br>Card Size : 85.6mm x 54mm<br>Card Thickness : 0.18mm to 0.33mm<br>Magnetic Stripe : 3-Track Read / Write<br>ISO 7811/4,5 Support   | Power: AC 90 to 132V, 50 / 60Hz<br>AC 198 to 264V, 50Hz<br>Resolution: 203dpi<br>Dimensions: W=119mm, H=132.5mm, D=270.5mm                            |
| <b>Warranty</b>   | For US and Canada: 3-year Limited Warranty, plus optional Extended Services Agreement Policies (Extend-A-Star and Swap-A-Star)   |   |
| <b>For Further Information</b>  | Sales: 1-800-782-7636 x107<br>Technical Support: 1-800-782-7636 x105   | Web: <a href="http://www.starmicronics.com">http://www.starmicronics.com</a>  |

